
TRIAC Dimmer Series



Dimensions



Wiring Diagram


CE RoHS

Specifications

Model:	DM9130H-T12/24		
Output Voltage:	12V DC/24V DC	Max output Power:	35W
Max current Load:	3A/1.5A	Dimming Voltage:	AC40-220V
Control channels:	1CH	The light gray level:	256
Gross Weight:	320g	Work Temp.:	-30℃~70℃

Basic Features

- AC 40V-220V triac dimmer and dimmer curve smoothing, according to the triac rectifier output voltage is proportional to the curve.
- With output short circuit protection, power protection, overheating protection function.
- The driver cascade when using please choose appropriate power triac dimmer.
- The Triac dimmer can cooperate with LUTRON and DYNALITE system.

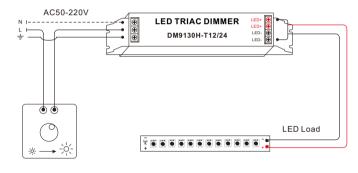

TRIAC DIMMER

*Before commissioning of the power, should ensure that all wiring is correct before electricity.

Suitable lamps and lanterns



DM9130H-T12/24 -V1.1